

(12) UK Patent Application (19) GB (11) 2 363 809 (13) A

(43) Date of A Publication 09.01.2002

(21) Application No 0015052.4

(22) Date of Filing 21.06.2000

(71) Applicant(s)
Schlumberger Holdings Limited
(Incorporated in the British Virgin Islands)
PO Box 71, Craigmuir Chambers, Road Town, Tortola,
British Virgin Islands

(72) Inventor(s)
Timothy Gareth John Jones
Li Jiang
Andreas Manz
Ratna Tantra

(74) Agent and/or Address for Service
Akram Karim Mirza
Schlumberger Cambridge Research Limited,
High Cross, Madingley Road, CAMBRIDGE, CB3 0EL,
United Kingdom

(51) INT CL⁷
E21B 49/08

(52) UK CL (Edition T)
E1F FHB
G1B BAA
G1N NBPX N25B N25C3H2 N25DX N25F7B

(56) Documents Cited
GB 2216569 A **US 5147561 A**

(58) Field of Search
UK CL (Edition R) **E1F FHB**
INT CL⁷ **E21B**
Online: WPI,EPODOC,JAPIO

(54) Abstract Title
Chemical sensor for wellbore applications

(57) A wellbore effluent analyzing device comprises a conduit 11 having an opening 12 through which effluent can flow to a first separation unit 13 which separates from the effluent a fluid sample according to chemical or physical properties. The sample then passes via conduit 14 to a second separation unit 15 which further separates the sample according to chemical or physical properties. The components of the further separated sample are detected by a sensor unit 16. An outlet 17 is provided for the disposal of the fluid that migrated through the device. The separation units may be phase selective membranes or columns.

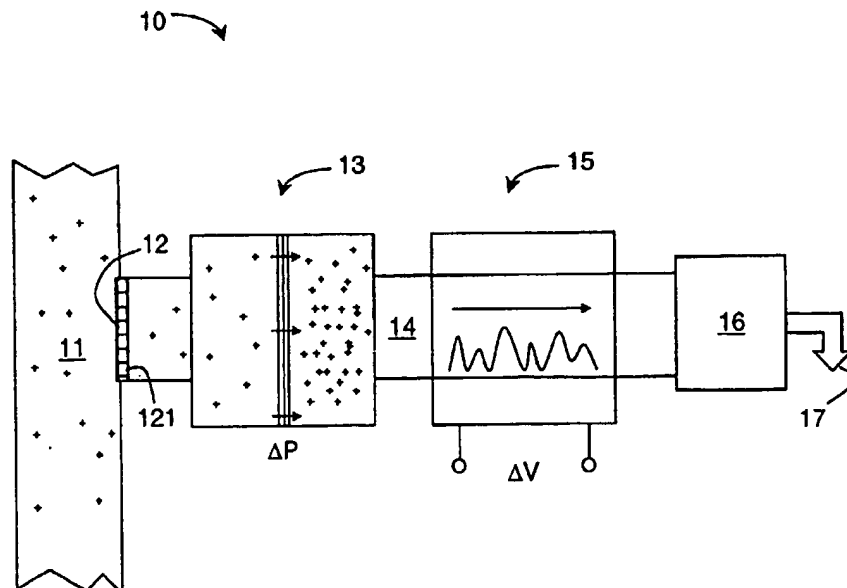


FIG. 1

GB 2 363 809 A

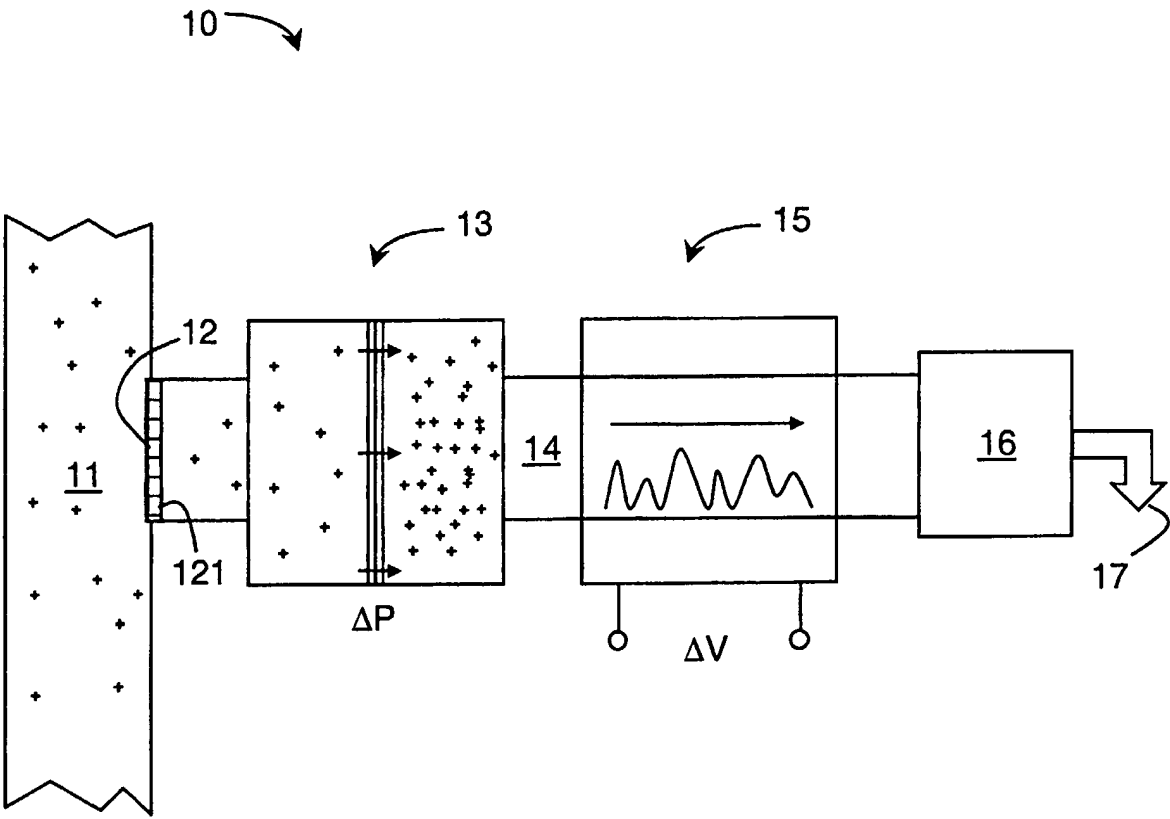


FIG. 1

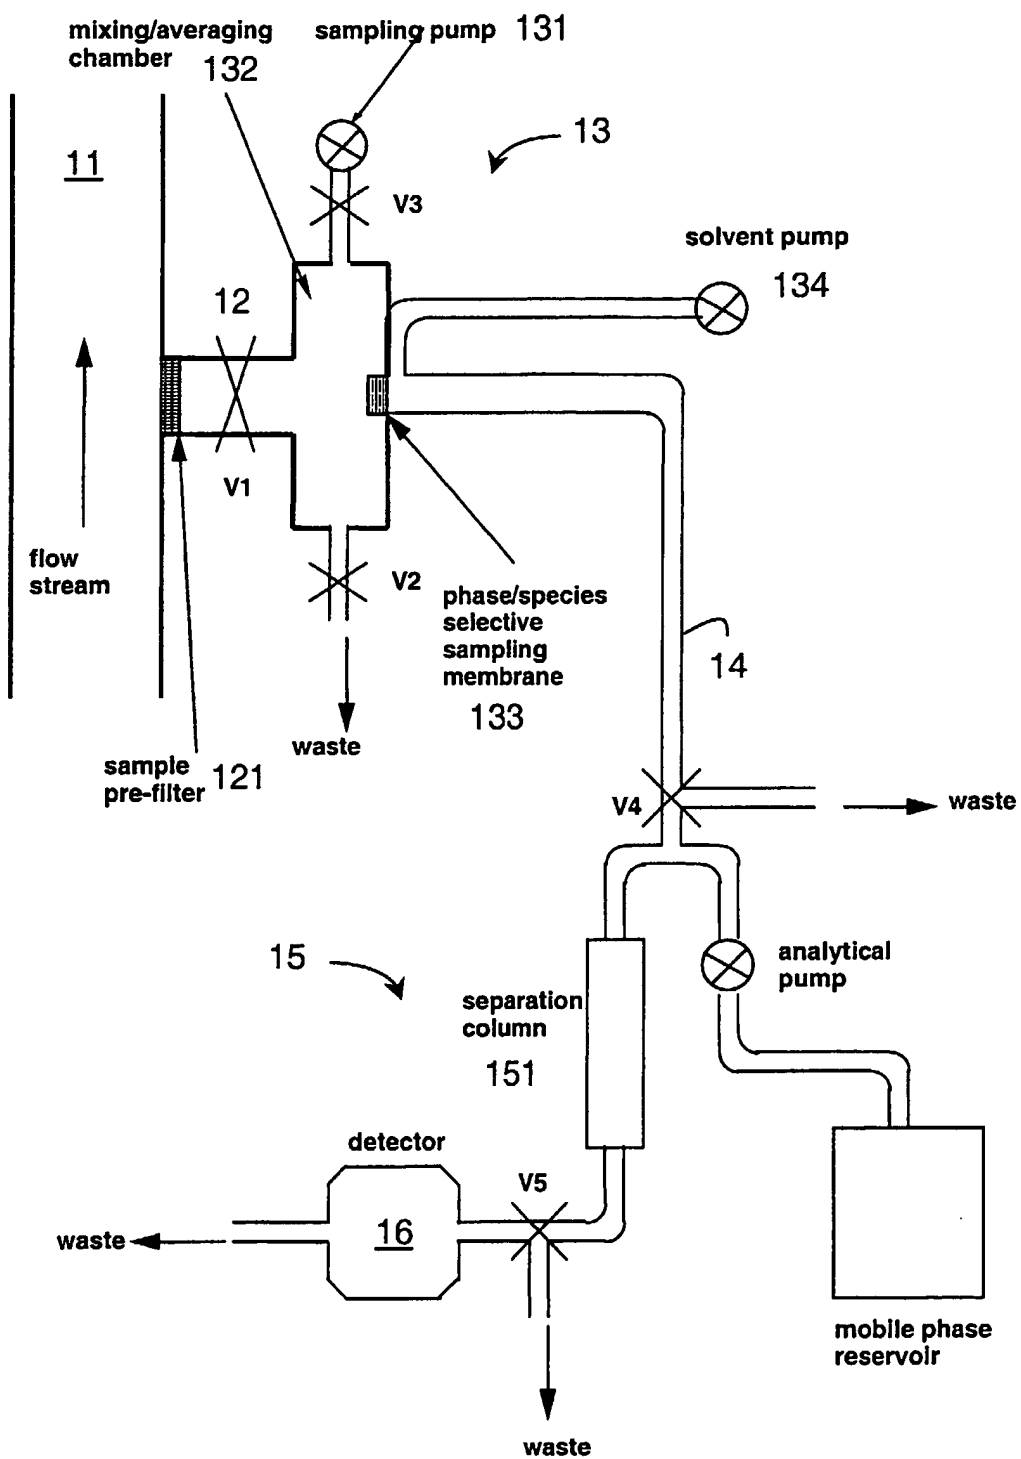


FIG. 2A

3/9

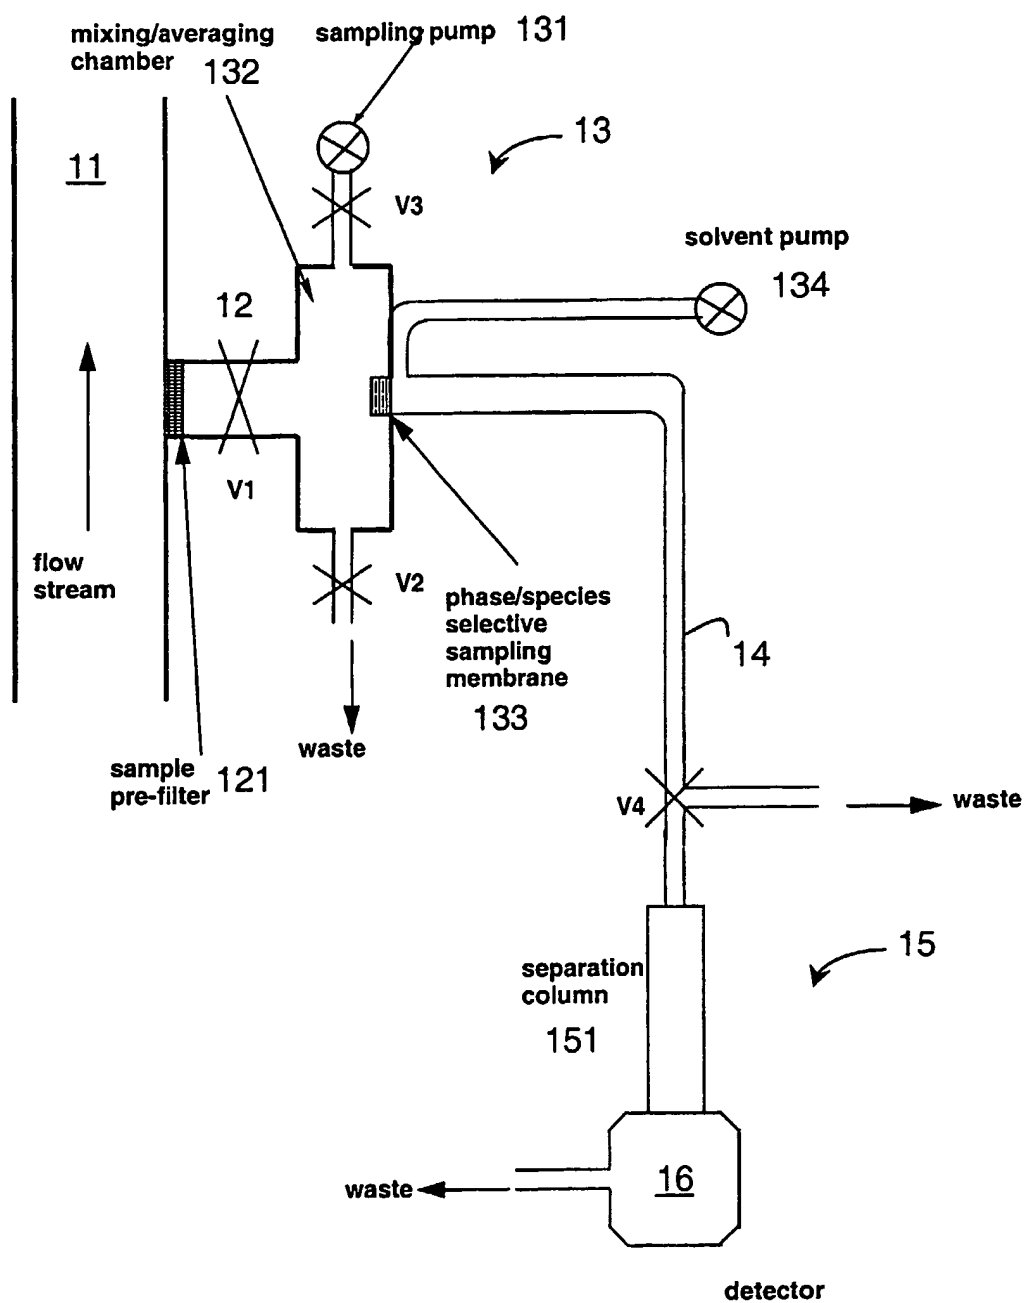


FIG. 2B

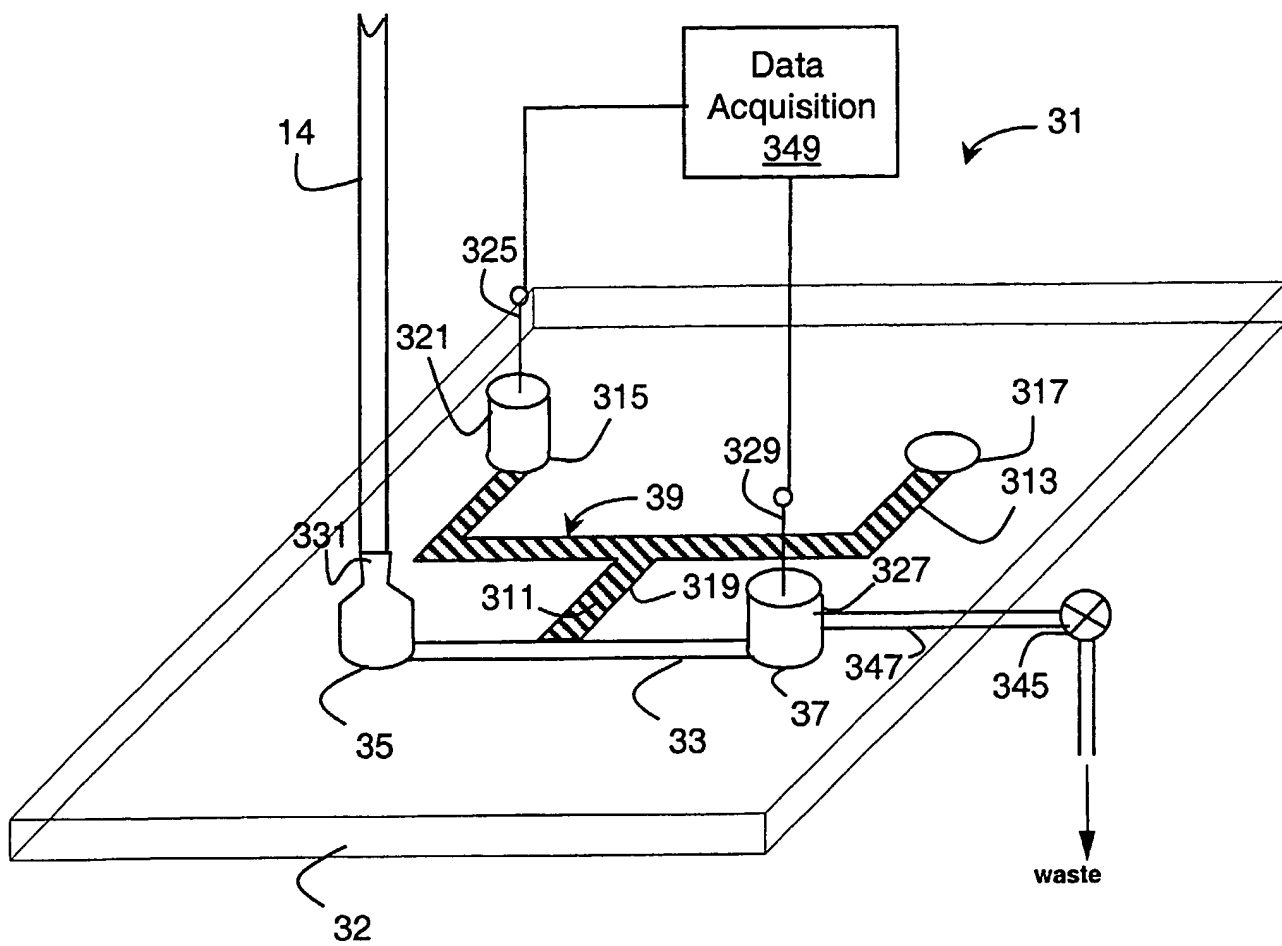


FIG. 3A

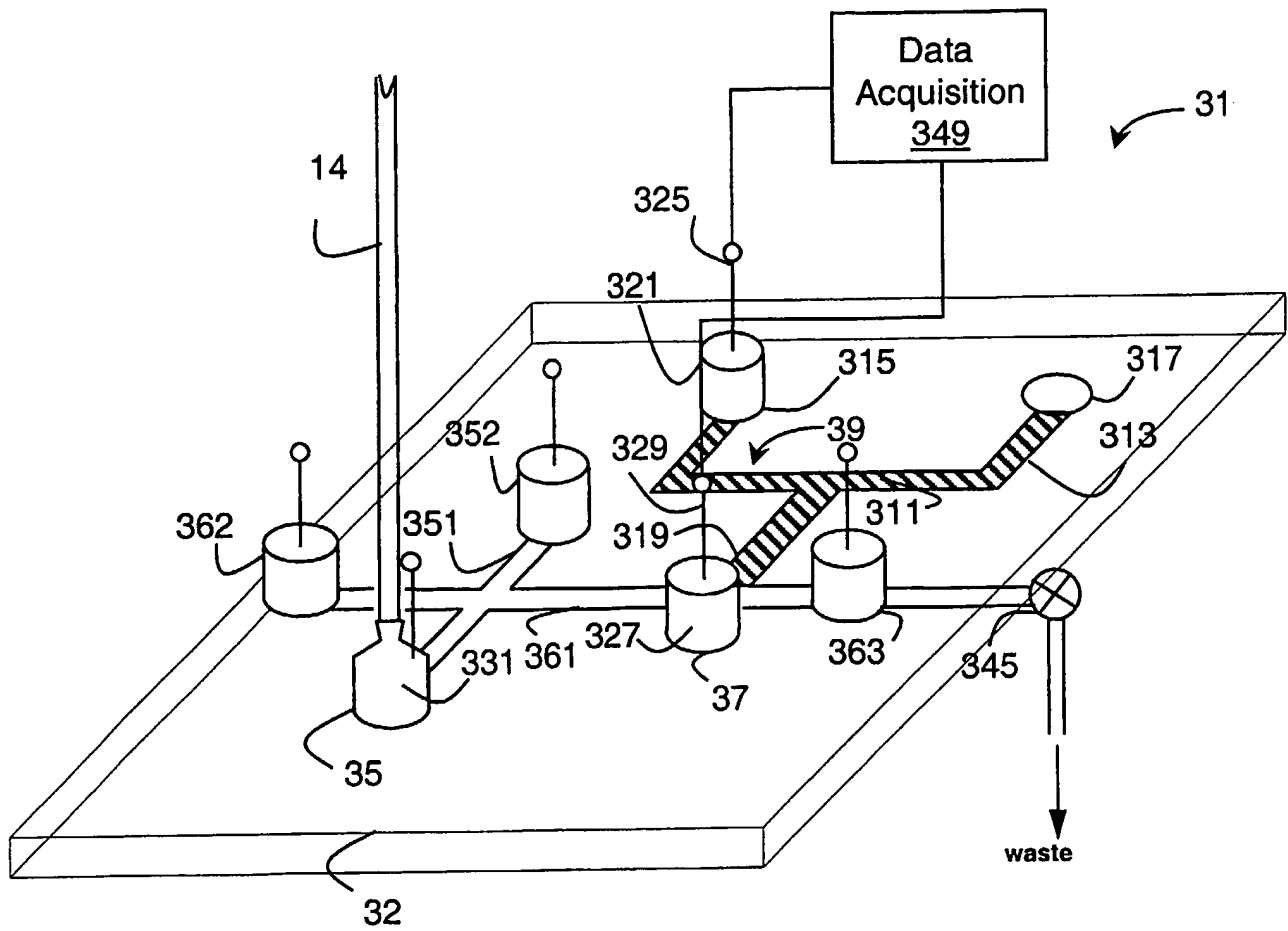


FIG. 3B

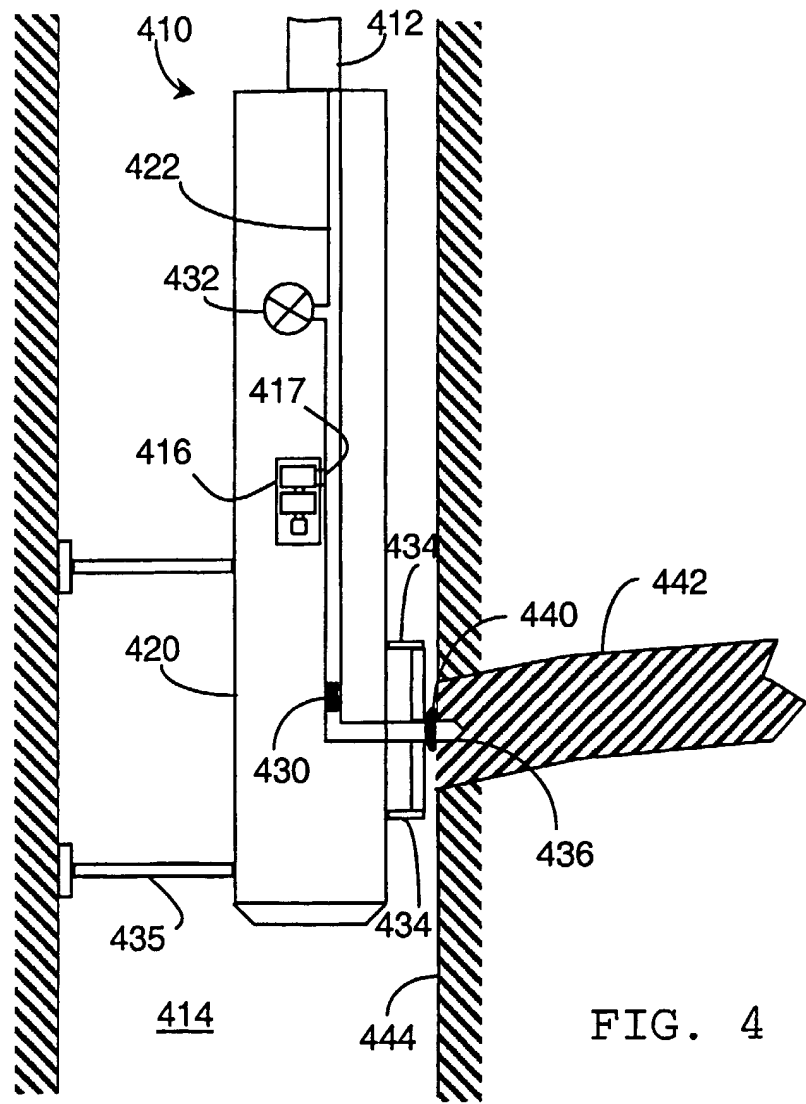


FIG. 4

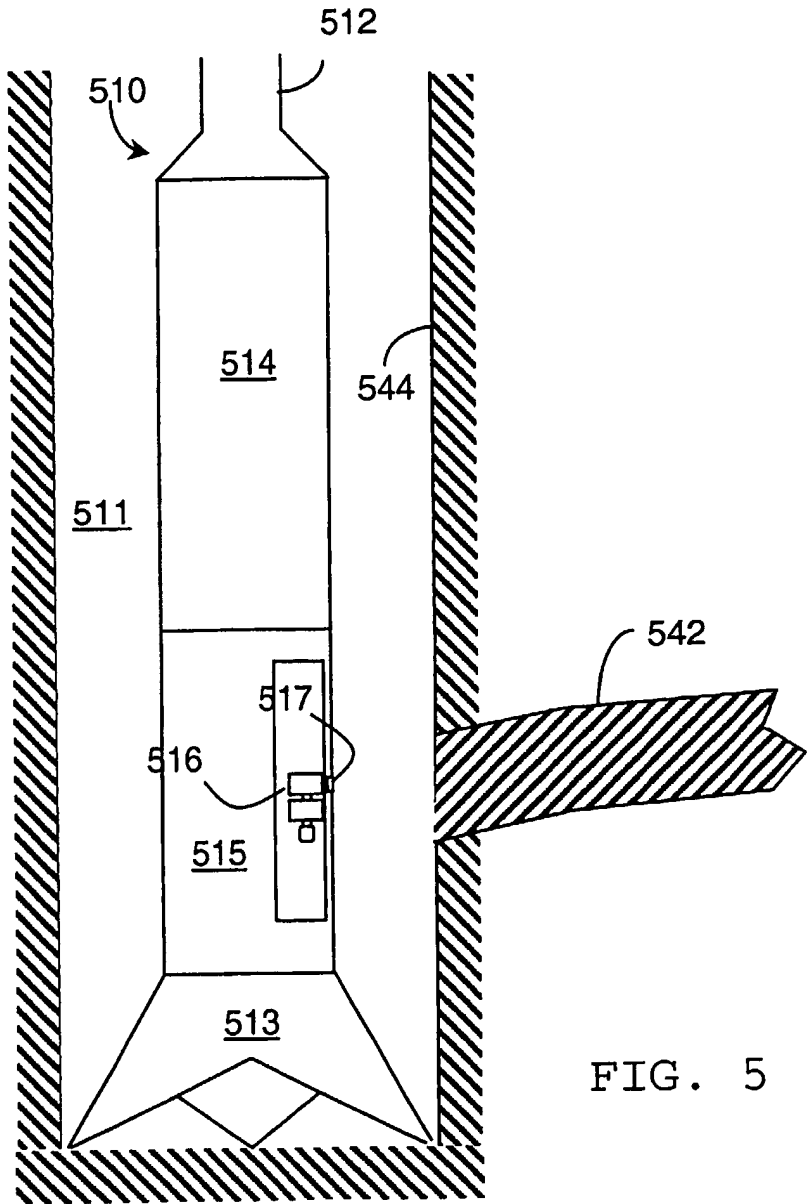


FIG. 5

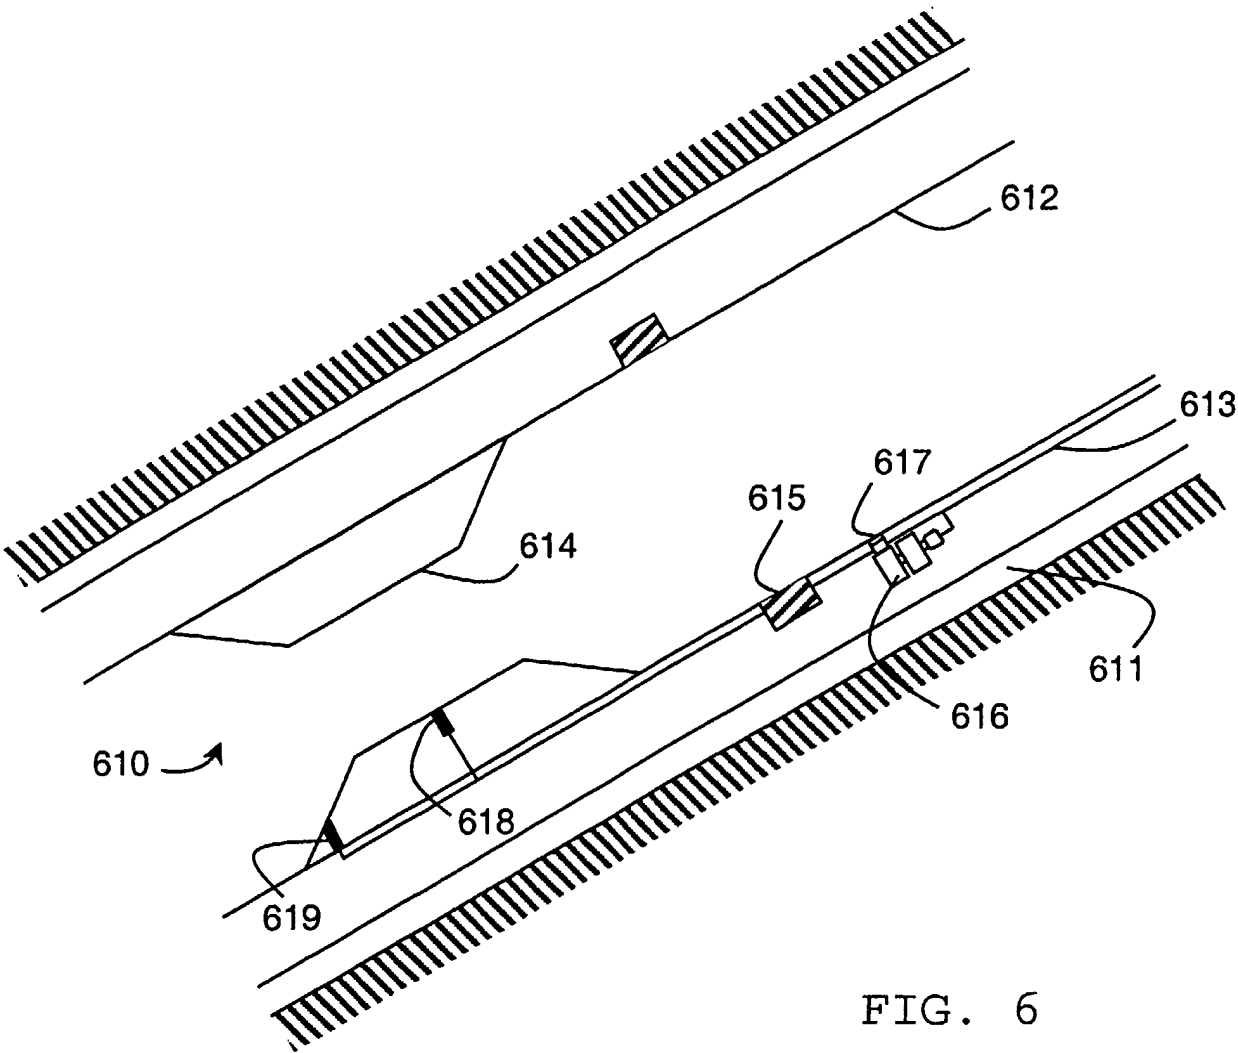


FIG. 6

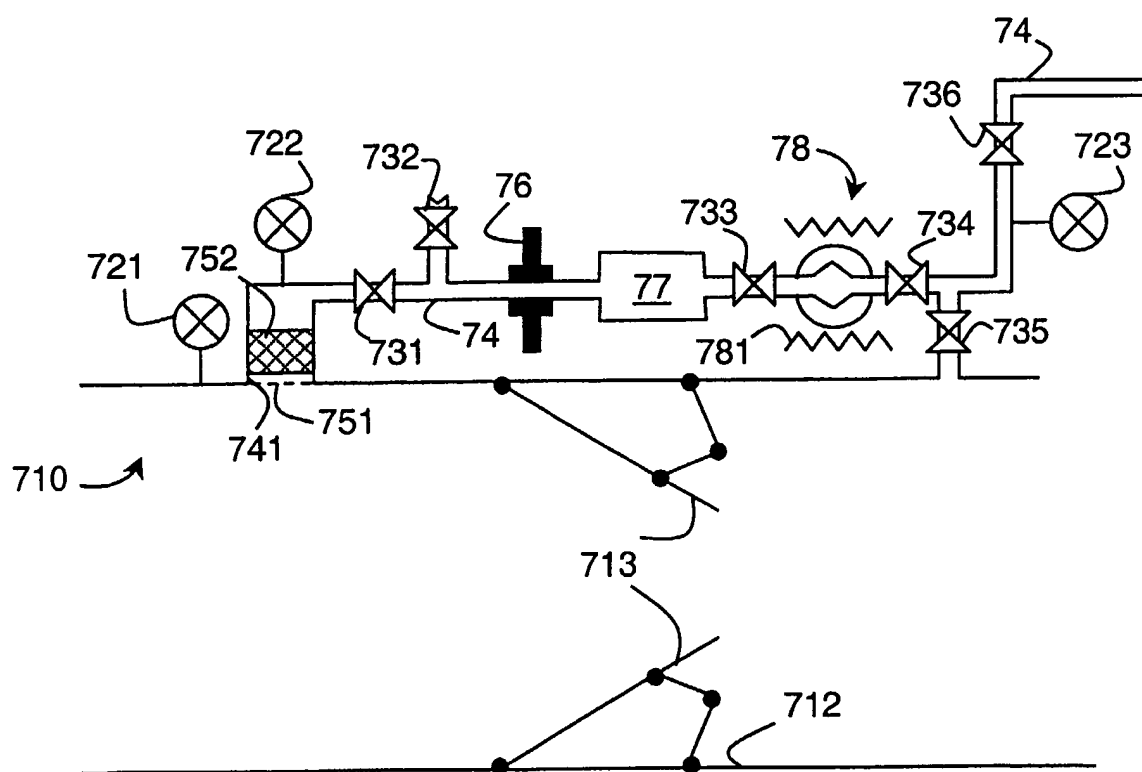


FIG. 7

Chemical Sensor for Wellbore Applications

The invention relates to a chemical sensor tool for use in downhole analyzing of fluids produced from subterranean formations.

BACKGROUND OF THE INVENTION

Analyzing samples representative of downhole fluids is an important aspect of determining the quality and economic value of a hydrocarbon or water producing formation.

Present day operations obtain an analysis of downhole fluids usually through wireline logging using a formation tester such as the MDT™ tool of Schlumberger Oilfield Services. However, more recently, it was suggested to analyze downhole fluids either through sensors permanently or quasi-permanently installed in a wellbore or through sensor systems mounted on a drillstring. The latter method, if successful implemented, has the advantage of obtaining data while drilling, whereas the former installation could be part of a control system for wellbores and hydrocarbon production, therefrom.

To obtain first estimates of the composition of downhole fluids, the current MDT™ tool uses an optical probe to estimate the amount of hydrocarbons in the samples collected from the formation. Other known sensors use resistivity measurements to discern various components of the formations fluid.

To meet demand for chemical measurements of increasing accuracy, it may appear obvious to adapt chemical analysis tools known from chemical laboratory practice to the hostile environment of a subterranean borehole. Such known analysis tools include for example the various types of chromatography, electrochemical and spectral analysis. However, a closer look at the environmental

conditions within a subterranean wellbore lets those attempts appear as futile.

Various types of downhole measurement tools are known. Examples
5 of such tools are found in the United States Patents Nos.
6,023,340; 5,517,024; and 5,351,532 or in the International
Patent Application WO 99/00575.

It is therefore an object of the present invention to provide
10 apparatus and methods that would allow the use of chemical
analysis tools known per se in a subterranean wellbore.

SUMMARY OF THE INVENTION

15 It was found that many problems associated with the use of
sensitive chemical analysis tools are grounded on a lack of
purity of samples as acquired from downhole formation.

Therefore, there is provided a wellbore fluid sampling device
20 comprising at least two separation stages for a sample of
downhole fluids characterized in that within each of said at
least two separation stages components of the sample are
separated by an active force.

25 Active forces as contemplated by the present invention may be
pressure gradients as generated by pumps, or electrical fields
generated by electrodes connected to different potentials, or a
combination of both. Each stage may be equipped with its own
force generator.

30

A separation stage is defined herein as a device or system that
separates fluid phases or, within a fluid phases, molecules or
ions according to their chemical or physical properties. Not
included in the definition of a separation stage are mesh type
35 filters. Those filters are widely used to remove solid particles
from the fluid samples. In contrast the separation stages within

the context of the present invention generally assume that the fluid sample at its input have been already subjected to a solid removal process.

- 5 A separation stage in accordance may comprise selective membranes, or chromatographic channels, i.e. paths along which different species migrate with different velocities.

10 The molecular target species preferable considered by the present invention are cations such as Ca^{2+} , Mg^{2+} , Sr^{2+} , Ba^{2+} , Na^{+} or K^{+} , anions such as CO_3^{2-} , SO_4^{2-} , PO_4^{3-} or Cl^{-} , various hydrocarbons as encountered in subterranean formations, or gases such as H_2S , CO_2 , CH_4 , or He.

- 15 In a preferred embodiment of the invention, at least one separation unit comprises an ion-selective membrane, or, even more preferable, a potentiometric sensor with an ion-selective membrane.
- 20 The device is preferably adapted to operate as sensor for various downhole applications, including wellbore logging, measurement-while-drilling (MWD), or permanent monitoring, i.e. as a fixed installation within the borehole.
- 25 Another industrial application of the present invention is the management and control of subterranean water reservoirs and aquifers.

30 These and other features of the invention, preferred embodiments and variants thereof, possible applications and advantages will become appreciated and understood by those skilled in the art from the following detailed description and drawings.

DRAWINGS

FIG. 1 shows a schematic diagram of the main elements in accordance with the present invention;

5

FIGS. 2A,B show details of two examples in accordance with the present invention;

10

FIG. 3A shows details of a potentiometric sensor with an ion-selective membrane as separator as employed in the example of FIG 2B;

15

FIG. 3B shows the sensor of FIG. 3A with an additional electrophoretic separation channel;

FIG. 4 illustrates the use of the analyzing tool as wireline logging tool;

20

FIG. 5 illustrates the use of the analyzing tool as part of an MWD (measurement-while-drilling) tool;

FIG. 6 illustrates the use of the analyzing tool as part of a permanently installed flow monitoring unit in a wellbore; and

25

FIG. 7 illustrates a further variant of an analyzing tool as part of a permanently installed flow monitoring unit in a wellbore.

30

MODE(S) FOR CARRYING OUT THE INVENTION

In FIG. 1, there is schematically illustrated how elements of an analyzing tool in accordance with the present invention interact

to achieve a better separation of the components of a downhole fluid and, hence, more accurate testing results.

According to FIG.1, a flow conduit **11** is provided with an
5 opening **12** through which at least a part of a fluid flowing
through the conduit can enter into a first separation unit **13**.
At the outlet of the first separation unit a conduit or flow
channel **14** then provides a flow path to the second separation
unit **15**. The outlet of the second separation unit has
10 communicates with a sensor unit **16** used to perform the detection
of the separated species of the flow. An outlet **17** is provided
for the disposal of the fluid that migrated through the device.

The flow conduit **11** may be communicating directly with the
15 fluids produced from the well. Or, alternatively, the conduit
can be a by-pass of a main conduit carrying at least parts of
the produced fluids. The conduit **11** may contain the original
fluid flow as produced from the formation or a pre-processed
fluid.

20 Between the conduit and the separation units there is a shown a
mesh **121** to prevent solid particles from entering the tool.

In the example depicted in FIG 1, the separation units are drawn
25 schematically as membrane type (separation unit **13**) and as
separation column type (separation unit **15**), respectively. The
selection of the precise separation mechanism is much a matter
of choice and depends on the species involved and upon design
considerations. The two separation mechanisms considered for
30 this example are firstly phase selective membranes such as gas
stripping membranes (surface selective flow membranes) for
gaseous phases and ZrSO₄, PTFE or silicon rubber membranes to
separate gas from an aqueous or organic phase. The second
mechanism is based on the variation of the migration or

diffusion pattern of a species through a medium, and is usually known as chromatography.

Both units **13**, **15** have an independent source of energy providing
5 energy to transport at least part of the fluid through the separation unit. Sources are conveniently force gradients, such as pressure gradients, temperature gradients, electrical or chemical potential gradients. Those gradients can be provided by pumps, particularly micropumps, electrical generators, heat
10 reservoirs etc.

The detector unit **16** is either a single detector or an array of detectors, either of the same type or a combination of different detectors. Suitable detectors are based on the emission or
15 absorption of electromagnetic waves (UV-Vis, IR, Fluorescence, Raman, NMR) or acoustic waves, or on electrochemical reactions (conductivity/resistance, potentiometric, amperometric) or other conventional detectors as used for example in the field of chromatography (FID, ECD). The detector itself is coupled to a
20 control and data acquisition system (not shown), which could be installed either locally, i.e., in vicinity of the sensor, or remotely, e.g. at the surface.

A more detailed illustration of the example is shown in FIG. 2.
25

FIG. 2A shows a chemical sensor and attached sampling interface for a multiphase, multicomponent fluid stream. The flow stream is sampled using the sampling interface, which consists of a pre-filter **121** to remove particulate matter, a pump **131** and a
30 chamber **132** to average the composition of the fluid stream over the time between analyses. The fluid from the sample stream is drawn into the sampling chamber through valve **V1** using a pump **131**. The pump **131** can be used to mix the fluid by pumping it forwards and backwards in the sample chamber **132**. The pump is
35 also able to empty the chamber of the sample by pumping to waste

or replacing the sample fluid with a second fluid from a reservoir, e.g., for the purposes of calibrating the chemical sensor or cleaning the chamber and associated pipe work. The two inlet ports to the sample chamber are controlled by the use of
5 valves **V1** and **V2**.

When a suitable sample has been captured and mixed in the sample chamber **132** valve **V2** is closed and the three-way valve **V4** is set to pump the fluid sample to waste. The fluid sample is passed
10 through a membrane filter **133** designed to let pass through a pre-determined phase of the fluid.

The separated phase is pumped to the chemical analysis system using the sampling/mixing pump **131** while the extracted component
15 is pumped to the analytical system using a second pump **134** and a suitable solvent for the extracted phase. For example, in the case of extracted carbon dioxide, the solvent could be a dilute solution of sodium hydroxide; the carbon dioxide is solubilised in the alkaline solution and converted to carbonate (or
20 bicarbonate) ions. The flow rate of solvent is controlled by the second pump **134** and is selected to with knowledge of the known rate of diffusion of the component across the separation membrane **133**.

25 When the sample or component for analysis has been pumped to valve **V4** it is switched from waste to the analysis system and an accurately known volume is delivered to the flow line **14** of the analysis system. The volume dose can be controlled either by the delivery pump **134** or using a suitable sample injection system.

30

The injected sample is pumped through the separation system **15**, such as a chromatography column or electrophoresis capillary column **151**, and the separated components analyzed by a suitable detector, e.g., electrochemical (potentiometric, amperometric)
35 or optical (spectrophotometric or fluorescent) detectors. Valve

V5 can be used to divert certain separated components from the detector to avoid problems of contamination or detector overload.

- 5 In the device shown in FIG. 2B, the separator and detector units are merged into one micro-measurement system as is described in more detail below. The separator unit 15 comprises a ion-selective membrane.
- 10 Ion-selective membrane electrodes are electrochemical electrodes that can be used in the direct measurement of the activity, and hence concentration, of analyte ions in sample solutions, particularly complex organic solutions. Selectivity for one species over another is determined by the nature and chemical
- 15 composition of the ion-selective membrane and the associated reaction layers used to fabricate the electrode. Such ion-selective membranes serve as an additional component of a classic two-electrode galvanic cell, with the potential developed at the interface between the membrane and the sample
- 20 solution being directly or indirectly related to the activity of the analyte ions in the sample solution.

The measurement principle of electrochemical cells incorporating ion-selective membrane electrodes is quite simple. Two

25 electrodes are separated by an ion-selective membrane, with the solution on one side of the membrane being an internal reference solution of known composition and including ions to which one electrode, referred to as the internal electrode, and the membrane respond, and the solution on the other side of the

30 membrane being a sample solution in contact with the other electrode, referred to as the external reference electrode.

In such electrochemical cells the phase-boundary potentials will be constant except for the membrane potential which is the

35 difference in the electrical potential between the internal

reference solution and the sample solution; the variation in this membrane potential being an indication of the activity of the analyte ions in the sample solution. In practice, the internal electrode, the internal reference solution and the ion-selective membrane are often housed in a single unit to provide an ion-selective electrode. In this arrangement the voltage is measured as an electromotive force (EMF) between the ion-selective electrode (ISE) and the reference electrode (RE) according to the formula $EMF = E_{ISE} - E_{RE}$.

10

The measurement system can be a microfabricated potentiometric sensor as disclosed for example in a paper by Uhlig et al entitled "Miniaturized Ion-Selective Chip Electrode for Sensor Application" as published in Analytical Chemistry, Vol. 69, No. 19, pages 4032 to 4038. These miniaturized sensors are fabricated by depositing a polymeric ion-selective membrane into anisotropically etched wells in a silicon wafer, and, in use, a sample solution is brought into contact with one side of the silicon wafer.

20

An improved and more rugged version of such a system which includes a separation stage and detection on one chip is described in FIG. 3.

25 In FIG. 3 there is shown the sensor 31 as fabricated in a substrate chip 32.

The chip 32 includes flow channel 33, in this embodiment of linear section, which includes an inlet port 35 and an outlet port 37 through which a sample solution is in use fed. In this embodiment the flow channel 33 is 10 mm in length, 200 μ m in width and 20 μ m in depth.

35 The chip 32 further includes a chamber 39 with an ion-selective membrane 311. The chamber 39 comprises a first, main region

313, in this embodiment of flattened U-shaped section, which includes first and second ports 315, 317 and a second, narrow junction region 319 that communicates directly with the flow channel 33 and extends substantially between midpoints of the main region 313 and the flow channel 33. In this embodiment, the main region 313 is 12 mm in length, 200 μm in width and 20 μm in depth, the first and second ports 315, 317 are 800 μm in diameter, and the junction region 319 is 830 μm in length, 20 μm in width and 20 μm in depth.

In this embodiment the chamber 39 is completely filled with ion-selective membrane 311 as shown. In other embodiments only the junction region 319 of the chamber 39 can be filled with the ion-selective membrane 311 or the U-shaped main region 313 of the chamber 39.

In another embodiment the chamber 39 can include an inert, porous supporting material, such as a ceramic, which is provided to support the ion-selective membrane 311 and improve the mechanical stability thereof.

The chip 32 is fabricated from two plates, in this embodiment composed of microsheet glass. In an alternative embodiment the plates could be formed of silicon wafers. In a first step, one of the plates is etched by HF wet etching to form wells which define the flow channel 33 and the main and junction regions 313, 319 of the chamber 39, with the wells having the respective dimensions mentioned hereinabove. In a second step, four holes are drilled, in this embodiment by ultrasonic abrasion, into the other plate so as to provide the inlet and outlet ports 35, 37 of the flow channel 33 and the first and second ports 315, 317 of the chamber 39. In a third step, the two plates are bonded together by direct fusion bonding. In a fourth step, the junction region 319 of chamber 39 is filled with an organic

cocktail that provides the ion-selective membrane 311. Filling is achieved by maintaining a gas flow, typically of an inert gas such as argon, through the flow channel 33 and introducing a predetermined volume of the organic cocktail into one of the
5 ports 315, 317 of the chamber 39. In this way, the main and junction regions 313, 319 of the chamber 39 are filled with the organic cocktail; organic cocktail being prevented from entering the flow channel 33 by the gas flow maintained therethrough. Where the chamber 39 is to include an inert, porous supporting
10 material, this material is introduced prior to or after fusing together the two plates. In a fifth and final step, the chip 32 is allowed to stand until the solvent in the organic cocktail of the ion-selective membrane 311 has evaporated and a dry ion-selective membrane 311 is formed. Typically, the chip 32 is
15 dried in a desiccator.

In this embodiment the organic cocktail comprises tetrahydrofuran (THF) as a solvent, o-nitrophenyloctyl ether (o-NOPE) as a solvent mediator, polyvinyl chloride (PVC) as a
20 polymeric matrix material, potassium tetrakis(4-chlorophenyl)borate (TPB) as a lipophilic salt for reducing electrical resistance, and an ion-transfer agent. Other suitable polymeric matrix materials include fluorosilicone elastomers that have a relatively low resistance and high
25 dielectric constant.

In a preferred embodiment the chamber 39 can be surface treated so as to be of increased hydrophobicity. Preferably, the chamber 39 is silanized by treating with a silane solution.
30 Appropriate silane solutions include the siloxane based solution Repelcote™ and 5 % dimethylchlorosilane in carbon tetrachloride. In practice, the chamber 39 is treated after bonding together the two plates by feeding a metered volume of silane solution, typically using a syringe needle, into one of the ports 315, 317
35 of the chamber 39 and simultaneously applying a vacuum,

typically using a vacuum pump, to the other of the ports **315**,
317 of the chamber **39** so as to fill the same. In order to
prevent the silane solution entering the flow channel **33**, a gas
flow, typically an inert gas such as argon, is maintained in the
5 flow channel **33**. The silane solution is maintained in the
chamber **39** for a short time, typically from 2 to 3 minutes, and
then completely withdrawn using the vacuum pump. This process
is then repeated so as to ensure complete silanization of the
chamber **39**.

10

The sensor **31** further comprises a first tubular section **321**, one
of the ends of which is enlarged and bonded to the chip **32**, in
this embodiment by an epoxy resin, so as to overlie the first
port **315** of the chamber **39**; the first tubular section **321**
15 defining a reservoir which contains an internal reference
solution, in this embodiment 0.1 M of KCl.

The sensor **1** further comprises an electrode element **325**, in this
embodiment an Ag/AgCl wire, disposed in the reference solution
20 contained by the first tubular section **321**.

The sensor **31** further comprises a second tubular section **327**,
one of the ends of which is enlarged and bonded to the chip **32**,
in this embodiment by an epoxy resin, so as to overlie the
25 outlet port **37** of the flow channel **33**; the second tubular
section **327** defining a reservoir for containing the sample
solution fed through the flow channel **33**.

The sensor **1** further comprises a reference electrode **329**
30 disposed in the second tubular section **327** so as to contact the
sample solution when contained therein. In this embodiment the
reference electrode **329** comprises a Flexref™ minaturized Ag/AgCl
electrode as available from World Precision Instruments of
Stevenage, UK.

The sensor 1 further comprises a third tubular section **331**, in this embodiment a fused silica capillary tube, bonded to the chip **32**, in this embodiment by an epoxy resin, so as to overlies the inlet port **35** of the flow channel **33**.

With this configuration, the ion-selective membrane **311**, the reference solution and the electrode element **325** together define an ion-selective electrode, such that, on feeding a sample solution through the flow channel **33**, a potential is developed across the ion-selective electrode and the reference electrode **329** corresponding to the membrane potential which is the electrical potential between the reference solution and the sample solution and is representative of the activity of the analyte ions in the sample solution.

The measurement system further comprises a solution feeder **14**, which connects to the first separation unit as shown in FIG 2B. The measurement system further comprises a data acquisition unit **349** for logging the electromotive force developed across the ion-selective electrode and the reference electrode **329** of the sensor **31**. In this embodiment the data acquisition unit **349** comprises a PICO-LOG™ data acquisition system as available from Pico-Technology of Cambridge, UK connected to the ion-selective electrode and the reference electrode **329** through a buffer amplifier for converting the high impedance voltage to a low impedance voltage.

In use, the solution feeder **14** configured to feed a sample solution at a predetermined flow rate through the flow channel **33** of the sensor **31**. As this sample solution is fed through the flow channel **33** the electromotive force generated across the ion-selective electrode and the reference electrode **329** is logged by the data acquisition unit **349**, which data can be used

to provide an on-line measurement of the activity of the analyte ions in the sample solution.

The system further comprises a pump 345 connected by tubing 347
5 to the sample solution reservoir defined by the second tubular section 327 for feeding the measured solution to waste.

The example of FIG. 3A can be combined with a further separation method, preferably mounted onto the same substrate.

10

In FIG. 3B such a further separation stage is shown added to the ion selective sensor of FIG. 3A. Essentially, the separation stage comprises a capillary electrophoretic channel. With an appropriate voltage applied to the buffer fluid reservoirs 362,
15 363, a sample migrates through the basic electrophoretic channel 361. To load samples into the electrophoretic channel 361, the system operates a cross-flow mechanism. As in the previous example, the initial sample flow is fed via feeder 14 and tube 331 to the inlet port 35. From the inlet port the sample flow is
20 guided through channel 351 to a waste outlet 352. By reducing the voltage across inlet 35 and outlet 352 below the voltage applied to the buffer fluid reservoirs 362, 363, a sample "plug" located at the crossing between the two channels 351, 361 flows along the capillary electrophoretic separation channel 361. In
25 the electrophoretic separation channel 361, the sample is separated according to the mobility of its components. Near the end of channel 361, an ion-selective sensor 31 (as described in the previous example) provides an additional separation combined with a quantitative measurement of the ionic concentration in
30 the sample. Fractions of the passing sample are absorbed by the ion-selective membrane and cause a change in the potential difference between electrodes 327 and 325. The system control and data acquisition unit 349 monitors the change.

In the following, a tool in accordance with the present invention is depicted in various types of downhole measurements.

In FIG. 4, there is shown a formation testing apparatus 410 held
5 on a wireline 412 within a wellbore 414. The apparatus 410 is a well-known modular dynamic tester (MDT, Mark of Schlumberger) as described in the co-owned U.S. Pat. No. 3,859,851 to Urbanosky U.S. Pat. No. 3,780,575 to Urbanosky and Pat. No. 4,994,671 to Safinya et al., with this known tester being
10 modified by introduction of an analyzing tool 416 as described in detail above. The modular dynamics tester comprises body 420 approximately 30m long and containing a main flowline bus or conduit 422. The analysing tool 416 communicates with the flowline 422 via opening 417. In addition to the novel sensor
15 system 416, the testing apparatus comprises an optical fluid analyser 430 within the lower part of the flowline 422. The flow through the flowline 422 is driven by means of a pump 432 located towards the upper end of the flowline 422. Hydraulic arms 434 and counterarms 435 are attached external to the body
20 420 and carry a sample probe tip 436 for sampling fluid. The base of the probing tip 436 is isolated from the wellbore 414 by an o-ring 440, or other sealing devices (packers).

Before completion of a well, the modular dynamics tester is
25 lowered into the well on the wireline 412. After reaching a target depth, i.e., the layer of the formation which is to be sampled (here: 442), the hydraulic arms 434 are extended to engage the sample probe tip 436 with the formation. The o-ring 440 at the base of the sample probe 436 forms a seal between the
30 side of the wellbore 444 and the formation 442 into which the probe 436 is inserted and prevents the sample probe 436 from acquiring fluid directly from the borehole 414.

Once the sample probe 436 is inserted into the formation 442, an

electrical signal is passed down the wireline **412** from the surface so as to start the pump **432** and the sensor systems **416** and **430** to begin sampling of a sample of fluid from the formation **442**. The first separation unit of the analyzing system
5 **416** is provided with a silicon rubber membrane. The following electrokinetic separation in the ion-selective channel and the potentiometric detector are adapted to measure the metal ion (Me^{2+}) content of the formation effluent.

10 A further possible application of the novel sensor and separation system is in the field of measurement-while-drilling (MWD). The principle of MWD measurements is known and disclosed in a vast amount of literature, including for example United States Patent No. 5,445,228, entitled "Method and apparatus for
15 formation sampling during the drilling of a hydrocarbon well".

In FIG. 5, there is shown a wellbore **511** and the lower part of a drill string **512** including the bottom-hole-assembly (BHA) **510**. The BHA carries at its apex the drill bit **513**. It includes
20 further drill collars that are used to mount additional equipment such as a telemetry sub **514** and a sensor sub **515**. The telemetry sub provides a telemetry link to the surface, for example via mud-pulse telemetry. The sensor sub includes the novel analyzing unit **516** as described above. The analyzing unit
25 **516** collects fluids from the wellbore via a small recess **517** protected from debris and other particles by a metal mesh.

During drilling operation wellbore fluid enters the recess **517** and, hence, the first separation unit of the analyzing tool **516**.
30 After further separation and detection as described above (FIGs. 2 and 3), the results are transmitted from the data acquisition unit to the telemetry unit **514**, converted into telemetry signals and transmitted to the surface.

35 A third application is illustrated in FIG. 6. It shows a

venturi-type flowmeter **610**, as well known in the industry and described for example in the United States Patent No. 5,736,650. Mounted on production tubing or casing **612**, the flowmeter is installed at a location within the well **611** with a wired
5 connection **613** to the surface following known procedures as disclosed for example in the United States Patent No. 5,829,520.

The flowmeter consists essentially of a constriction or throat **614** and two pressure taps **618**, **619** located conventionally at the
10 entrance and the position of maximum constriction, respectively. Usually the venturi is combined with a densiometer **615** located further up- or downstream.

The novel analyzing unit **616** is preferably located downstream
15 from the venturi to take advantage of the mixing effect the venturi has on the flow. A recess **617** protected by a metal mesh provides an inlet to the unit.

During production wellbore fluid enters the recess **617** and,
20 hence, the first separation unit of the analyzing tool **616**. After further separation and detection as described above (FIGs. 2 and 3), the results are transmitted from the data acquisition unit to the surface via the wires **613**.

25 A further example of the present invention is shown in FIG. 7. The illustrated device is part of a downhole installation **710** employed to monitor the flow through a downhole conduit **712**. The device by-passes a flow restriction a The monitoring system comprises three pressure sensors **721,722,723** and six valves **731-
30 736** located at various position along a conduit **74**. The conduit has a first opening **741** covered by a mesh **751**. The mesh **751** protects a subsequent phase filter **752**. Also positioned along the conduit **74** are a conductivity detector **76** and a mixing chamber **77** followed by a pumping system **78**. The pumping system
35 **78** is operated through thermal expansion. The necessary thermal energy is provided by an electrical heating coil **781**. The output flowline leads to the on-chip separation and analyzing unit

described in FIG. 3.

In operation a multiphase flow 711 is produced from the well and pumped through the conduit 712. A sample from the main conduit
5 is collected through the phase filter 752 (a water saturated ceramic with pore sizes below 1 micron) that allows only the aqueous phase to pass. The fluid sample passes through the filter under a pressure gradient temporarily generated by closing the flow restricting system 713. The pressure gradient
10 can be measured using the pressure transducers 721, 722. When the valve 731 is opened the water sample passes through a conductivity detector 76. The conductivity detector is employed to determine the salinity of the water. Valve 732 is used to release unwanted samples. For further treatment, the sample is
15 collected in the mixing chamber 77 where one or more samples can be mixed to give an averaged representative sample of the fluid over a collection interval. A small pumping system, e.g. a thermal expansion pump, is used to feed a controlled flow into the sensor system for quantitative analysis as described above
20 (FIG. 3). The flow is controlled using valve 736 and the pressure sensor 723. In preparation for further sampling, the conduit 74 can be flushed via valve 735.

The above examples illustrate possible uses of the novel
25 analyzing tool, but are not meant to exclude other possible application of the analyzing tool in the field of wellbore fluid analysis.

CLAIMS

1. A wellbore effluent analyzing device comprising
a main conduit carrying in operation said wellbore effluent,
5 a sample channel communicating through at least one opening
with said main conduit,
a first separation stage generating a forced flow of said
effluent through a first separation member thereby
separating from said effluent a fluid sample according to
10 chemical or physical properties;
a second separation stage generating a forced flow of said
sample through a second separation member thereby further
separating said sample according to chemical or physical
properties; and
15 a sensor unit to detect components of said further separated
sample.
2. An analyzing device according to claim 1 wherein at least
one of the separation stages is adapted to separate
20 hydrocarbon and aqueous phases in the effluent.
3. An analyzing device according to claim 1 wherein at least
one of the separation stages comprises a migration path or
column filled with material providing different migration
25 velocities to different molecules.
4. An analyzing device according to claim 1 wherein at least
one of the separation stages comprises a membrane as
separation member.
30
5. An analyzing device according to claim 4 wherein the
membrane is made of material selected from a group
comprising PTFE, ZrSO_4 , or silicon rubber.
- 35 6. An analyzing device according to claim 4 wherein the

membrane is ion-selective.

7. An analyzing device according to claim 1 comprising a
pumping system generating a forced flow through at least one
5 of the separation members.

8. An analyzing device according to claim 1 comprising an
electrical voltage generator to generate a forced flow
through at least one of the separation members.
10

9. An analyzing device according to claim 1 wherein at least
one of the separation units and the sensor unit are
microfabricated.

15 10. An analyzing device according to claim 1 wherein at least
one of the separation units and the sensor unit are mounted
on a common substrate.

11. An analyzing device according to claim 1 wherein the sensor
20 unit is sensitive to charged atoms or molecules.

12. An analyzing device according to claim 11 wherein the sensor
unit is sensitive to charged atoms or molecules selected
from a group consisting of Ca^{2+} , Mg^{2+} , Sr^{2+} , Ba^{2+} , Na^+ , K^+ ,
25 CO_3^{2-} , SO_4^{2-} , PO_4^{3-} and Cl^- .

13. An analyzing device according to claim 11 wherein the sensor
unit comprises a potentiometric sensor.

30 14. An analyzing device according to claim 1 wherein the sensor
is sensitive to organic molecules.

15. An analyzing device according to claim 1 housed in a body
adapted to engage with a wireline and to be suspended from
35 said wireline.

16. An analyzing device according to claim 1 housed in a body mounted on a drill string.
- 5 17. An analyzing device according to claim 1 housed in a body mounted on a production or casing well tubular.
- 10 18. An analyzing device according to claim 1 further comprising a solid removal filter or mesh located in flow direction before said first separation stage.



Application No: GB 0015052.4
Claims searched: 1-18

Examiner: David Pepper
Date of search: 18 September 2000

Patents Act 1977

Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.R): E1F FHB.

Int Cl (Ed.7): E21B.

Other: Online: WPI, EPODOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	GB 2216569 A (Conoco Inc)	-
A	US 5147561 A (Burge et al)	-

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.